






Annular BOP Equipment

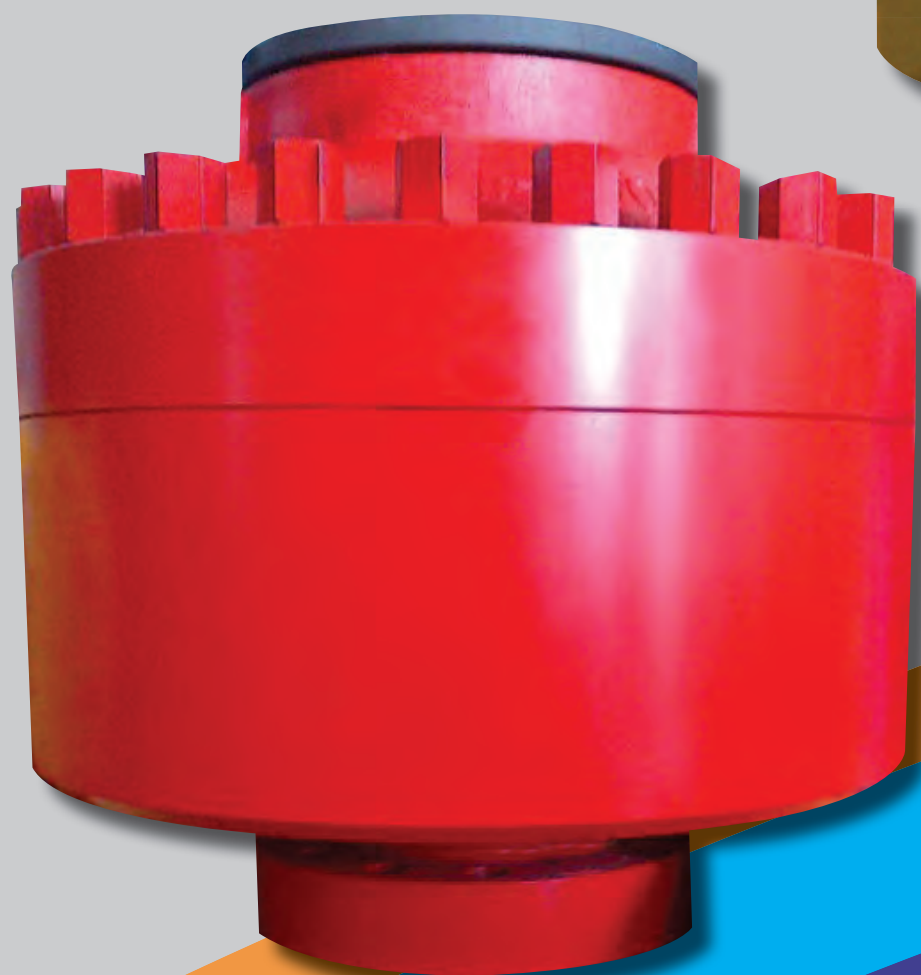

BUX™ Model 'D' ABOP

7 1/16" 5000psi, 9" 3000/5000psi, 11" 3000/5000psi, 13 5/8" 5000psi

BUX™ Model 'D' Annular Blow Out Preventer 7 1/16" 5000psi, 9" 3000/5000psi, 11" 3000/5000psi, 13 5/8" 5000psi Annular BOP's								
Bore	7 1/16"	7 1/16"	9"	9"	11"	11"	13 5/8"	13 5/8"
Working Pressure psi	3000	5000	3000	5000	3000	5000	3000	5000
Factory Test Pressure psi	IAW 16A TEST PROCEDURE							
Normal Operating Pressure psi	1500	1500	1500	1500	1500	1500	1500	1500
Height (in.)	31.4"	31.4"	33"	33.9"	34.3"	43.7"	40.5"	45.3"
Width (in.)	29.3"	29.3"	35.5"	40"	39.9"	45.1"	46.4"	50"
Weight (lbs.)	3348	3348	5276	6569	6490	10,285	9,100	14,113
Hydraulic Connection	npt 1"	npt 1"	npt 1"	npt 1.25"	npt 1.25"	npt 1.25"	npt 1.25"	npt 1.25"
Hydraulic Closing Volume (gal's)	5.54	5.54	8.98	11.1	13.19	19.0	23.5	24.8
Hydraulic Open Volume (gal's)	4.0	4.0	6.0	8.7	10.3	14.7	14.67	18.2

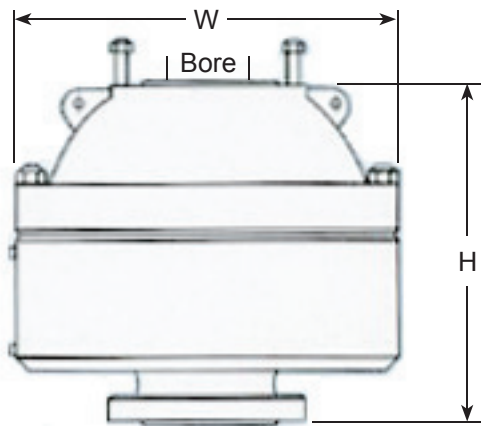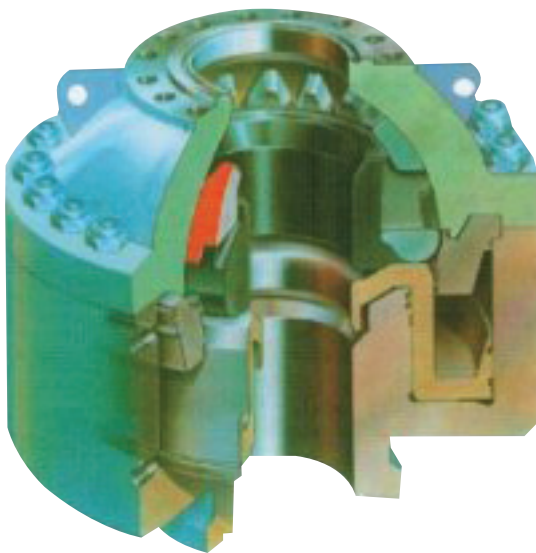

Features and Benifits:

- MFG IAW/NACE MR OI-75
- Short Height
- Light Weight
- Easy to Maintain
- Wear Bands Prevent Metal-to-Metal Friction and Wear
- Interchangeability of Industry-Standard Spare Parts
- Ideally Suited for Well Control, Snubbing and Stripping Operations
- Reliable Sealing Element

KANA Energy Services, Inc., Sales and Service, Houston, Texas

BOPs MFG by: (HRSB) Rongsheng Mach. MFG Ltd. API 16A-0100 (Monogrammed)
HeBei BoLu TianBao Petroleum Equipment Mfg. Co. Ltd. API 16A-0403 (Monogrammed)

Pressure Control Equipment



BUX™ MODEL 'D' Annular Blow Out Preventer Equipment

KANA Energy Services, Inc., Sales and Service, Houston, Texas

www.kanaenergyservices.com

Catalog 0002 Rev B